


COMMONWEALTH OF AUSTRALIA

Patent Act 1952

APPLICATION FOR A STANDARD PATENT
OR A STANDARD PATENT OF ADDITION

46294/85

Insert full
name(s) of
applicant(s)
Insert address(es)
of applicant(s)(71) I/We Michael John Lettierof 43 Rockingham Road, Sydney, N.S.W.Insert type
of invention(54) hereby apply for the grant of a ☒ standard patent
☐ patent of addition for an invention entitledKEYBOARD SUPPORT(Indicate appropriate
box)which is described in the accompanying ☒ provisional
☐ complete specification.Insert name of
actual inventor(72) The actual inventor(s) of the said invention is/are Michael John LettierInsert address
for service of
notices in
Australia(74) My/our address for service is 43 Rockingham Road, Sydney, N.S.W.
Attorney Code

*THESE SECTIONS ARE ONLY TO BE COMPLETED WHERE APPLICABLE:

for Convention
cases only

ONLY TO BE USED IN THE CASE OF A CONVENTION APPLICATION

Details of basic application(s) -

(31) Number of basic application

(33) Name of Convention country in which basic application was filed ISO Code

(32) Date of basic application

for Divisional
applications only

ONLY TO BE USED IN THE CASE OF A FURTHER APPLICATION MADE BY VIRTUE OF SECTION 51

(52) Number of original application

Person by whom made

for Patent of
addition only

ONLY TO BE USED IN THE CASE OF AN APPLICATION FOR A PATENT OF ADDITION

I request that the patent may be granted as a patent of addition to the patent applied for on

(61) Application No. Patent No.

in the name of

I request that the term of the patent of addition be the same as that for the main invention or so much of the
term of the patent for the main invention as is unexpired.Insert day, month
and year form
signedDated this 6th day of August 1984Signature of
applicant or
Australian
attorney

ACCEPTED AND AMENDMENTS

TO 8-12-84Michael John Lettier
(Signature)COMPLETION AFTER PROVISIONAL SPECIFICATION No. 46294/85
THE COMMISSIONER OF PATENTSThis form must be accompanied by either a provisional specification (Form 9 and true copy) or by a complete
specification (Form 10 and true copy).

(NON-CONVENTION—One or More Persons)

FORM 7—REGULATION 12 (1)

COMMONWEALTH OF AUSTRALIA

PATENTS ACT, 1952-1969

DECLARATION IN SUPPORT OF AN
APPLICATION FOR A PATENT

FEE STAMPS

(a) Here insert (in
full) Name of
Applicant(s).

In support of the Application made by ^(a)
MICHAEL JOHN COTTERILL

for a patent for an invention entitled:

(b) Here insert Title
of Invention.

(b) "KEYBOARD SUPPORT"

I/~~WE~~, ^(a) MICHAEL JOHN COTTERILL

(c) Here insert (in
full) Address(es).

of ^(c) 43 Rocklea Crescent,
Sylvania Heights, N.S.W. 2224

do solemnly and sincerely declare as follows:

1. I am/~~WE~~ the Applicant(s) for the Patent.
2. I am/~~WE~~ the actual Inventor(s) of the invention (or, where a person
other than the Inventor is the Applicant).

(d) Here insert full
Name(s) and
Address(es) of Ac-
tual Inventor(s) if
other than Appli-
cant(s).

2. ^(d)

_____ is/are
the actual Inventor(s) of the invention and the facts upon which I am/we are entitled
to make the Application are as follows:

~~I am/We are the Assignee(s) of the said Inventor(s).~~

DECLARED at SYDNEY, AUSTRALIA

this 16th day of August, 19 85

(e) Signature(s) of
Applicant(s).

^(e)

Michael John Cotterill

MICHAEL JOHN COTTERILL

To THE COMMISSIONER OF PATENTS.

(12) PATENT ABRIDGMENT (11) Document No. AU-B-46294/85
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 581471

(54) Title
KEYBOARD SUPPORT

(51)⁴ International Patent Classification(s)
A47B 009/00 A47B 021/02

(21) Application No. : 46294/85 (22) Application Date : 06.08.84

(23) Filing Date of Complete Specification : 16.08.85

(43) Publication Date : 20.03.86

(44) Publication Date of Accepted Application : 23.02.89

(60) Related to Provisional(s) : PG6409

(71) Applicant(s)
MICHAEL JOHN COTTERILL

(72) Inventor(s)
MICHAEL JOHN COTTERILL

(74) Attorney or Agent
SHELSTON WATERS

(56) Prior Art Documents
19530/83 A47B 13/00, 21/02, 37/00
15412/83 A47B 21/02
10051/83 558310 A47B 21/02

(57) Claim

1. Keyboard support apparatus comprising a keyboard support bracket, a mounting bracket adapted in use to mount the apparatus to a stationary support, and a linkage system connecting the keyboard support bracket and the mounting bracket; said linkage system comprising a first member connected to the keyboard support bracket for pivotal motion about a first axis, the first member being connected to the mounting bracket for pivotal motion about a second axis parallel to the first; a second member parallel to the first member and connected to the mounting bracket for pivotal motion about a third axis parallel to and spaced from the second, the second member being connected to the keyboard support bracket for pivotal

(11) AU-B-46294/85
(10) 581471

-2-

motion about a fourth axis parallel to the first, said members with said brackets forming a four bar linkage, and one of the members being connected to one of the brackets by adjustment means which also allow relative translational movement of the member and bracket with respect to each other in a plane perpendicular to the respective axis such that adjustment of the altitude of the keyboard support bracket relative to the stationary support and adjustment of tilt of the keyboard support bracket about a horizontal axis are permitted; said linkage system also including a single control means manually operable to releasably lock the adjustment means to enable or disable both said adjustment of altitude and said adjustment of tilt.

581471

FORM 10

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952-69

COMPLETE SPECIFICATION

FOR OFFICE USE:

Class

Int. Class

Application Number:
Lodged:

Complete Specification Lodged:
Accepted:
Published:

Priority:

Related Art:

46294/85

Name of Applicant: MICHAEL JOHN COTTERILL

Address of Applicant: 43 ROCKLEA CRESCENT
SYLVANIA HEIGHTS

N.S.W. 2224
Actual Inventor: MICHAEL JOHN COTTERILL

Address for Service: Shelston Waters, 55 Clarence Street, Sydney

Complete Specification for the invention entitled:

"KEYBOARD SUPPORT"

The following statement is a full description of this invention, including the best method of performing it known to me/us:—

Complete of PG6409
dated 6th August, 1984

— 1 —

SW16

This invention relates to a computer keyboard supporting mechanism.

Desks or workstations specifically intended to support a computer keyboard and a visual display unit are now well known. Some include means for adjusting the working height of the keyboard. Some also, or instead, include provision for adjustably tilting the keyboard. It is usually not as simple as is desired to alter the height and tilt of a keyboard to suite an individual operator since altitude and tilt each require adjustment of separate controls. Moreover most adjustment mechanisms involve structural modification of the desk or workstation framework and cannot readily be incorporated in existing furniture or undesirably intrude into space beneath the keyboard thereby restricting the knee room available or the clearance required for a keyboard operator to swivel.

An object of the present invention is to overcome or at least ameliorate some of the disadvantages of the prior art.

According to one aspect the invention consists in a keyboard support apparatus comprising a keyboard support bracket, a mounting bracket adapted in use to mount the apparatus to a stationary support, and a linkage system connecting the keyboard support bracket and the mounting bracket; said linkage system comprising a first member connected to the keyboard support bracket for pivotal motion about a first axis, the first member being connected to the mounting bracket for pivotal motion about a second axis parallel to the first; a second member parallel to the first



member and connected to the mounting bracket for pivotal motion about a third axis parallel to and spaced from the second, the second member being connected to the keyboard support bracket for pivotal motion about a fourth axis parallel to the first, said members with said brackets forming a four bar linkage, and one of the members being connected to one of the brackets by adjustment means which also allow relative translational movement of the member and bracket with respect to each other in a plane perpendicular to the respective axis such that adjustment of the altitude of the keyboard support bracket relative to the stationary support and adjustment of tilt of the keyboard support bracket about a horizontal axis are permitted; said linkage system also including a single control means manually operable to releasably lock the adjustment means to enable or disable both said adjustment of altitude and said adjustment of tilt.

Embodiments of the invention will now be more particularly described by way of example only with reference to the accompanying drawings in which:

Figure 1 shows a first embodiment in plan.

Figure 2 shows the embodiment of figure 1 in front elevation.

Figure 3 shows the embodiment of figure 1 in side elevation viewed as on line 3-3 figure 1.

Figure 4 shows the embodiment of figure 1 in section viewed as on line 4-4 of figure 1.

Figure 5 shows a portion of the embodiment of figure 1 in cross section viewed as on line 5-5 of figure 1.



Figure 6 shows the embodiment of figure 1 when in a configuration different from that shown in figure 3.

Figure 7 shows schematically a second keyboard support apparatus in side elevation.

Figure 8 shows of a third embodiment of the invention in isometric view.

With reference to Figures 1 to 6 there is shown a mechanism for supporting a keyboard from a desk or work station.

10 The mechanism consists in a mounting bracket 1 of inverted "L" shaped cross-section when viewed from the front and which comprises a side plate 2 and a flange 3 provided with screw holes whereby the mounting bracket 1 may be mounted below a stationary support such as a desk surface 7 or table top.

 A keyboard support means comprises a bracket 4 also of inverted "L" shaped cross-section, which has a side plate 5 and a flange 6 provided with screw holes for attachment of bracket 4 to the underside of a keyboard or of a keyboard platform 8.

20

For preference keyboard platform 8 is a timber or reinforced plastic worktop and is provided with a non-slip upper surface.

Mounting bracket 1 is connected to the keyboard support bracket 4 by a linkage system including an upper connecting member 10 and a lower connecting member 20.

Upper member 10 is pivotally connected by means of a headed pin 12 at or adjacent one member end to side plate 2

of mounting bracket 1 and is pivotally connected at or adjacent the other member end by means of pin 14 to side plate 5 of keyboard support 4.

Lower member 20 is pivotally mounted at or near one member end 21 to side plate 2 of mounting bracket 1 by means of pin 23 and has a slot 25 longitudinally extending from adjacent the other end 24 towards pin 23.

Lower member 20 is pivotally connected with keyboard support means of a headed pivot pin 26 of which the shank extends through an aperture of side plate 5, through slot 25, and which has a retaining head or flange of greater width than slot 25.

A spring 29 is connected to lower member 20 by means of spring retaining lug 27 situated at or near the member mid point and extends to spring retaining lug 28 at or near flange 3 of mounting bracket 1. Members 20 and 10 are substantially parallel and together with side plates 2 and 5 constituted a 4 bar linkage such that when mounting bracket 1 is fixedly mounted to stationary support desk 7, keyboard support bracket 4 is movable upwards or downwards relative to desk 7 by swing movement of members 10 and 20 about the horizontal axis of pins 12 and 23. Pin 14 permits movement of keyboard support bracket 4 pivotally with respect to member 10 about a horizontal axis enabling tilt adjustment of keyboard platform 8.

Tilting of keyboard platform 8 is accommodated by movement of pivot pin 26 slidably with respect to slot 25 of member 20.

A spring 39 extends from spring retaining lug 37 located near the lower corner of side plate 5 closest to pivot 23 to retaining lug 38 near end 24 of member 20. Spring 39 biases keyboard platform 8 toward a substantially horizontal orientation while spring 29 biases keyboard support bracket 4 towards a position in which flanges 3 and 6 are substantially coplanar that is to say in which keyboard support platform 8 is substantially level with table top 7.

10) A locking clamp assembly shown in more detail in figure 5 comprises a coach bolt 30 having a head 31 and a partly threaded stem 32 which extends through upwardly extending slot 37 of side plate 5, through a compression washer 33, through slotted aperture 25 of member 20, through a spacer washer 34, a spring washer 34a, and into a threaded socket of a handle or triwheel 36, (handle 36 is omitted from figures 1 to 4 and 6 for clarity).

By turning handle 36 lower member 20 and washer 33 may be screw clamped in tight abutment with side plate 5 preventing both upward and downward movement of the mechanism and also preventing tilting movement of keyboard platform 8.

Slot 37 accommodates relative movement of member 20, side plate 5 and the locking clamp assembly during adjustment of or altitude of keyboard platform 8 relative to desk top 7 when, for example, the keyboard platform is maintained in a horizontal disposition.

In the preferred embodiment keyboard support bracket 4 is connected to a second keyboard support bracket 40 laterally spaced from bracket 1 by means of platform 8. Support bracket 40 has a downwardly extending side plate 43 and a mounting flange 44 adapted to be secured to a keyboard platform 8.

Similarly mounting bracket 1 is connected to a second mounting bracket 50 spaced laterally apart from mounting bracket 1 by means of hollow tubular cross bar 41 and by a distance corresponding substantially to the spacing between brackets 4 and 40.

Bracket 50 has a downwardly extending side plate 53 and a mounting flange 54 adapted for screw fastening of bracket 50 to the undersurface of desk top 7.

Brackets 40 and 50 are pivotally connected by an arm member 45 connected by pivot pin 46 to keyboard bracket side plate 43 and by pivot 46a to support bracket side plate 53.

Member 45 is substantially parallel to member 10. Side plates 43 and 53 do not need to extend downwardly to the same extent as side plates 2 and 5 and thus provide more clearance below brackets 40 and 50 for a keyboard operator to swivel than exists below brackets 1 and 4.

For preference spring 29 is of heavier duty than spring 39.

Members 10 and 20 may be disposed on opposite sides of side plates 1 and 4 as shown in figures 1 to 6.

For preference also the forward edges of the keyboard output bracket are provided with a rubber or plastic protective sheath.

Member 20 is a first member to which keyboard support means 4 is connected for pivotal motion about a first axis, that of pin 26.

Member 20 is pivotally connected to mounting bracket 1 for pivotal motion about a second axis, that of pin 23, parallel to the axis of pin 26. Member 10 is a second member connected to mounting bracket 1 for pivotal motion about a third axis, that of pin 12, which is spaced from pin 23. Member 10 is connected to keyboard support bracket 4 by means of pin 14 which defines a fourth axis parallel to the first axis.

In use a keyboard is mounted directly to flanges 6 and 44 or else placed on a keyboard support platform 8.

By turning handle 36 to unclamp the linkage parts, the keyboard or support platform 8 can be raised or lowered and can be tilted relative to desk top 7. When a desired altitude and angle of tilt is achieved further upward and downward adjustment and further tilting can both be prevented by turning handle 36 to reclamp the parts.

The clamp assembly can be released with one hand, the other hand being used to achieve a desired adjustment against the bias of springs 29 and 39. Springs 29 and 39 support the keyboard during adjustment when clamp 36 is released.

The apparatus may be retro-fitted to many existing desks or tables and does not require a special desk frame. Moreover sufficient clearance is generally available below bracket 40 to permit a keyboard operator sitting at a keyboard to swivel.

With reference to figure 7 there is shown an apparatus having parts corresponding in function to those of figures 1 to 6 except insofar as hereinafter described.

10 In the embodiment of figure 7, keyboard support bracket 4 is pivotally connected with mounting bracket 1 by means of arm 60. Arm 60 is connected to mounting bracket 1 at pin 52 and to bracket 4 at pin 63. A first strut 64 is pivotally connected to platform 8 by means of a rear bracket 55 and pivot pin 56, a second strut 58 is pivotally connected to mounting plate 1 by means of pivot pin 59 which is spaced apart from and below pivot pin 52.

Arm 60 and first strut 64 are each slotted. Pin 30 of a clamp assembly similar to that previously described with reference to figure 5 pierces the free end 57 of second strut 58 and extends through slot 62 of arm 60 and slot 61 of strut 64.

When a triwheel is screwed tight on pin 30, arm 60 strut 58 and strut 64 are clamped to each other and the mechanism is immobilized. When the parts are unclamped, arm 20 60 is able to swing about pivot 52 permitting the platform to be raised or lowered in altitude and platform 8 is free to tilt about pivot pin 53 as required.

For preference clamp pin 30 has a threaded handle at one end and at the other end has a square shoulder adapted for translation in the slot 62.

Spring 29 and 39 are preferably provided to bias the platform towards a horizontal tilt orientation and to bias the platform towards a level or raised position relative work surface 7.

With reference to figure 8 there is shown a further embodiment in which parts of similar function to those of the first embodiment are identified by like numerals. In the embodiment shown in figure 8, brackets 70 are provided for supporting a VDU unit above the desk surface. VDU support brackets 70 are intended to project upwardly through appropriate slots to be cut in a desk top 7.


VDU support brackets 70 are supported from mounting brackets 1, 5 by means of pantograph arms 71, 72 pivotally connected to bracket 70 at one end by means of pivot pins 75, 76 and to support bracket 1 at the other by means of pivot pins 77, 78 VDU brackets 70 are biased towards a raised position by a spring 73 extending from a lug near the upper edge of side plate 1 to a lug 79a on lower pantograph arm 72.

If desired a clamp arrangement similar to or differing from that described for the keyboard support mechanism may be provided to lock the VDU brackets at a desired height.

Although preferred embodiments of the invention are designed for fitting to existing desks or tables, the mechanism can be built into furniture and parts of the furniture can be used as mounting brackets. For example members 10 and 20 could be pivotally mounted desk legs or other parts which perform the function of mounting side plates 2 in the embodiment of figure 1 described.

Similarly brackets 1 can be adapted for mounting to surfaces other than the underside of the table or desk top without departing from the invention hereof.

As will be apparent to those skilled in the art from the teaching hereof, the invention herein disclosed may be embodied in other forms, and such variations are deemed to be within the scope hereof.



THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. Keyboard support apparatus comprising a keyboard support bracket, a mounting bracket adapted in use to mount the apparatus to a stationary support, and a linkage system connecting the keyboard support bracket and the mounting bracket; said linkage system comprising a first member connected to the keyboard support bracket for pivotal motion about a first axis, the first member being connected to the mounting bracket for pivotal motion about a second axis parallel to the first; a second member parallel to the first member and connected to the mounting bracket for pivotal motion about a third axis parallel to and spaced from the second, the second member being connected to the keyboard support bracket for pivotal motion about a fourth axis parallel to the first, said members with said brackets forming a four bar linkage, and one of the members being connected to one of the brackets by adjustment means which also allow relative translational movement of the member and bracket with respect to each other in a plane perpendicular to the respective axis such that adjustment of the altitude of the keyboard support bracket relative to the stationary support and adjustment of tilt of the keyboard support bracket about a horizontal axis are permitted; said linkage system also including a single control means manually operable to releasably lock the adjustment means to enable or disable both said adjustment of altitude and said adjustment of tilt.

2. Apparatus according to Claim 1 wherein the adjustment means interconnects the keyboard support bracket and the first member.
3. Apparatus according to Claim 2 wherein the adjustment means allow slidable movement between the keyboard support bracket and the first member.
4. Apparatus according to Claim 3 wherein the adjustment means comprises a pin of either the keyboard support bracket or the first member, the pin being slidably received in a slot of the other.
5. Apparatus according to any one of the preceding claims wherein the control means comprises clamping means including complimentary threaded parts screw engageable to clamp the adjustment means.
6. Apparatus according to Claim 5 wherein the threaded parts include a stem which passes through a slot in the respective member and through a slot in the respective bracket.
7. Apparatus according to any one of the preceding claims wherein the keyboard support bracket is resiliently biased towards a position which in use is substantially untilted.
8. Apparatus according to any one of the preceding claims wherein the keyboard support bracket is resiliently biased towards a position which in use is a raised position.

9. Apparatus according to any one of the preceding claims comprising a pair of connected laterally spaced mounting brackets and a pair of connected laterally spaced keyboard supporting brackets.
10. Apparatus according to any one of the preceding claims wherein a mounting bracket is of inverted "L" cross section and have a side plate which in use is downwardly extending.
11. Apparatus according to any one of the preceding claims wherein a mounting bracket is attached to the undersurface of a desk or table.
12. Apparatus according to any one of Claims 1 to 9 wherein a mounting bracket, is a part of the structure of a desk or table.
13. Apparatus according to any one of the preceding claims wherein the keyboard support bracket further includes a platform mounted to the keyboard support bracket.
14. Apparatus according to Claim 13 wherein the platform is provided on its upper surface with a non slip surface.
15. Apparatus according to any one of the preceding claims further including a VDU support bracket connected to the mounting bracket by a pantographic linkage.

16. A keyboard support apparatus substantially as herein described with reference to figures 1 to 6 or figure 8 of the drawings.

DATED this 24th day of November, 1968

MICHAEL JOHN COTTERILL

Attorney: IAN T. ERNST

Fellow Institute of Patent Attorneys of Australia
of SHELSTON WATERS

15 000 000

1029~55

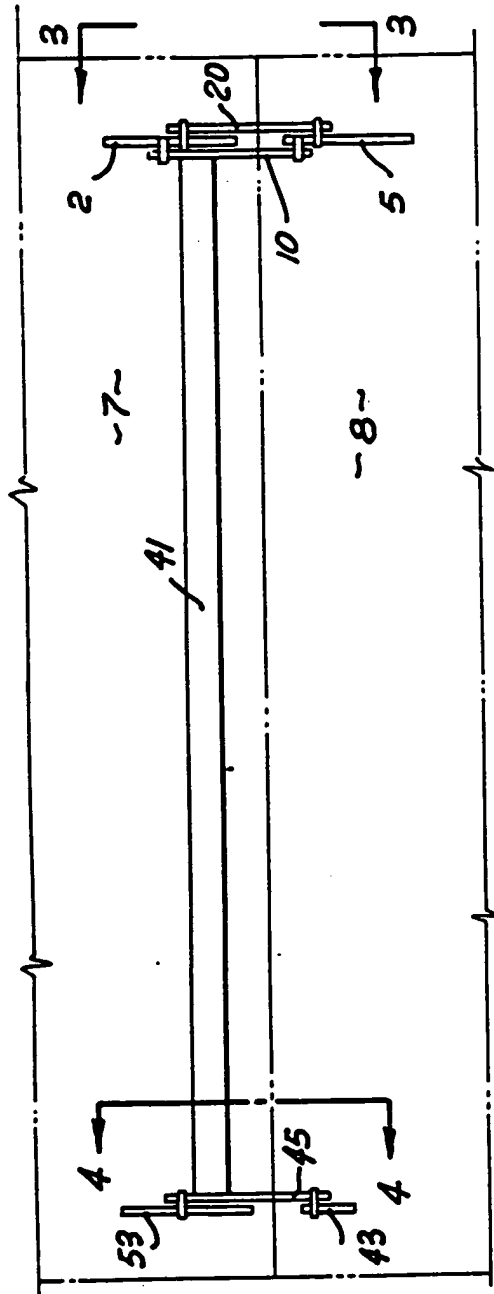


FIG. 1





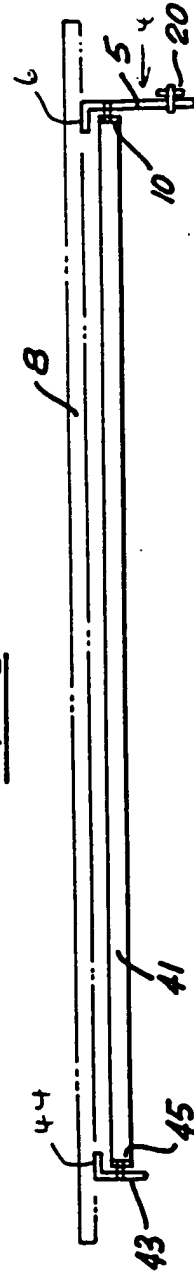



FIG. 2

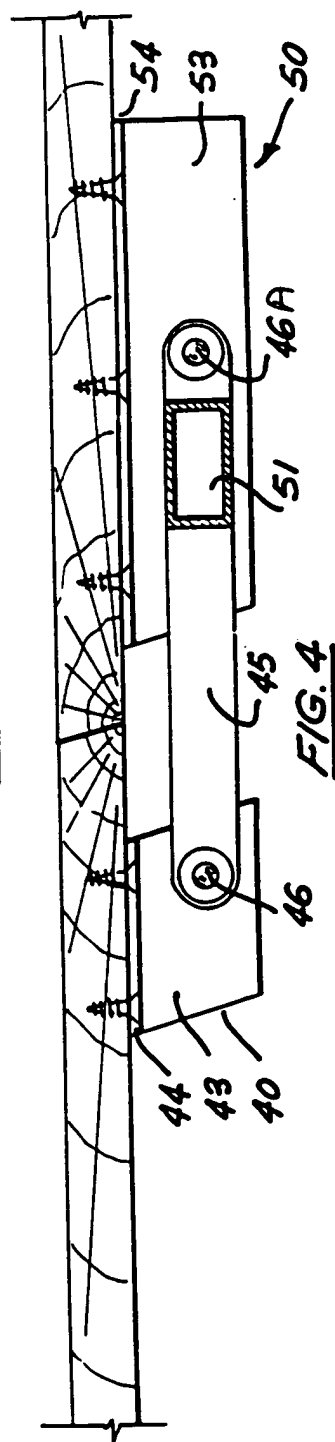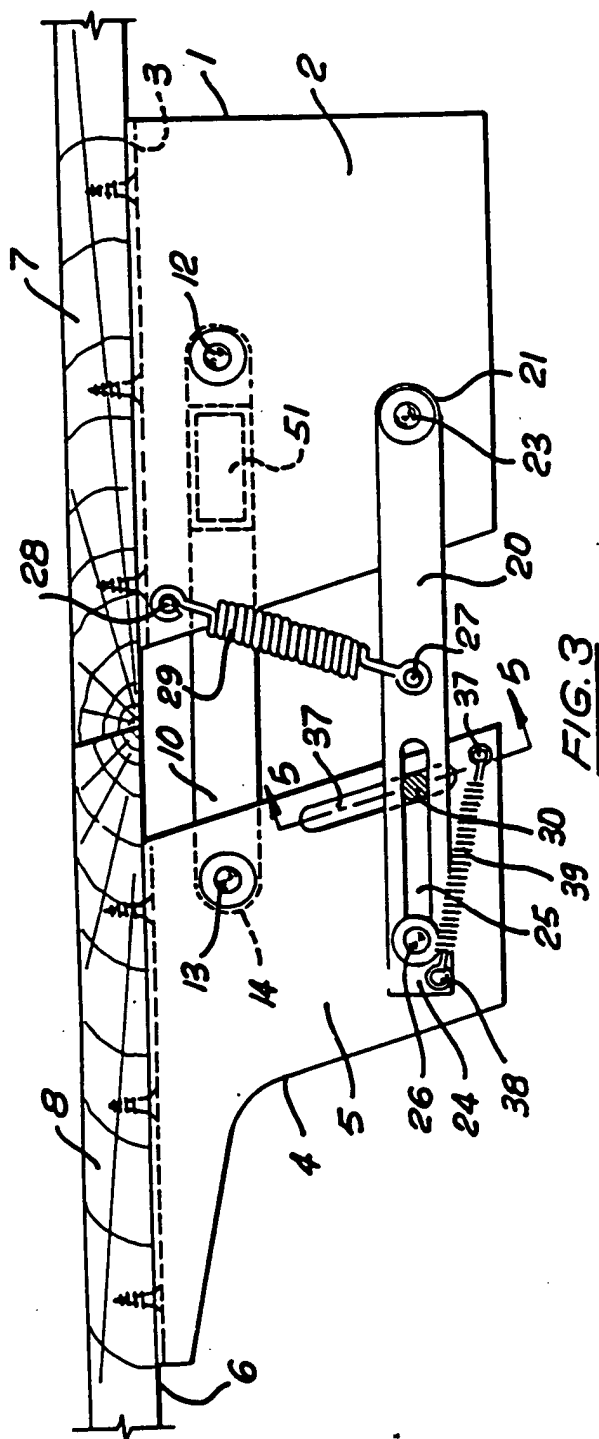

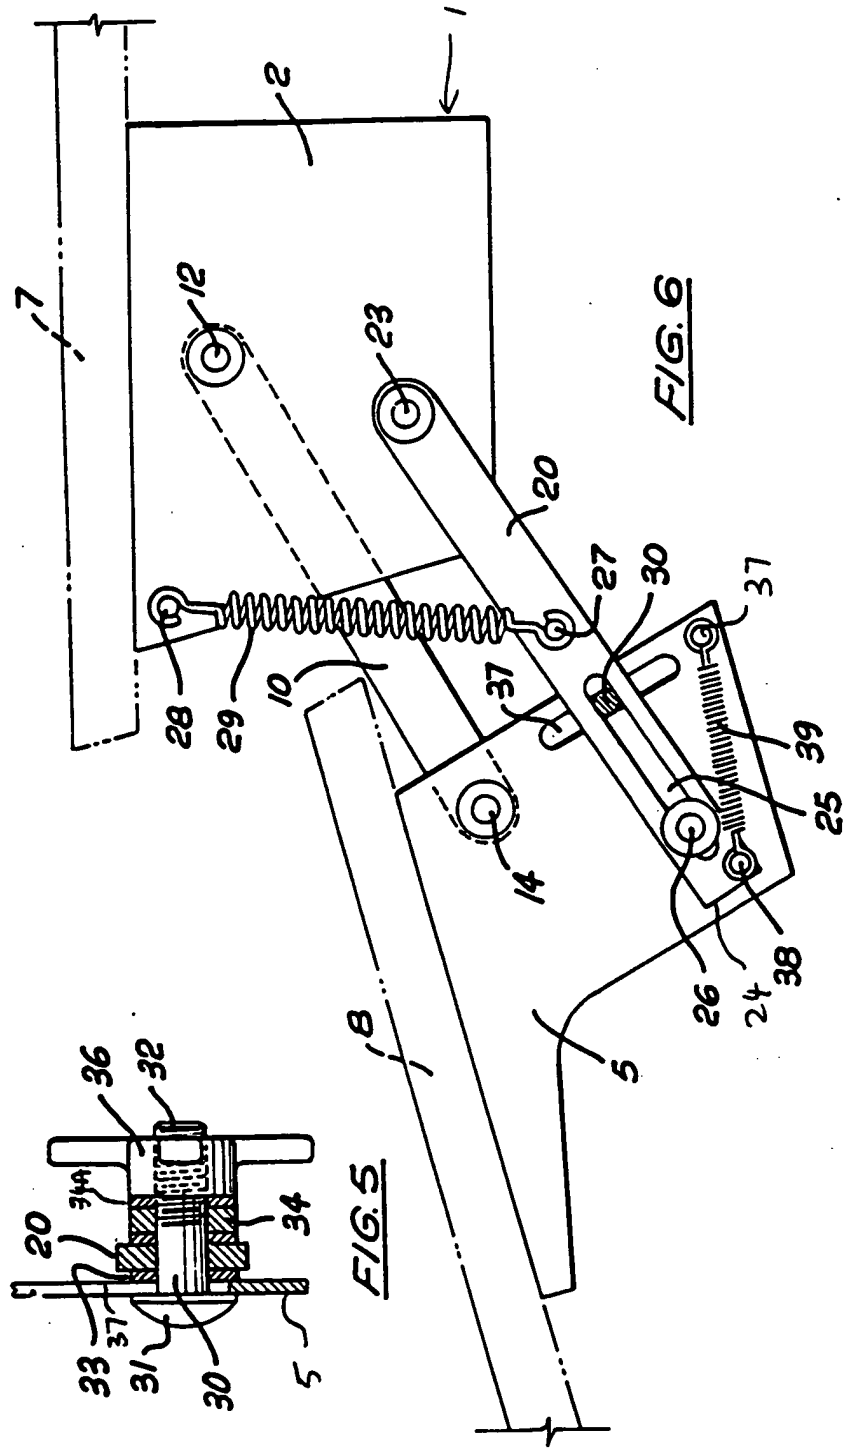

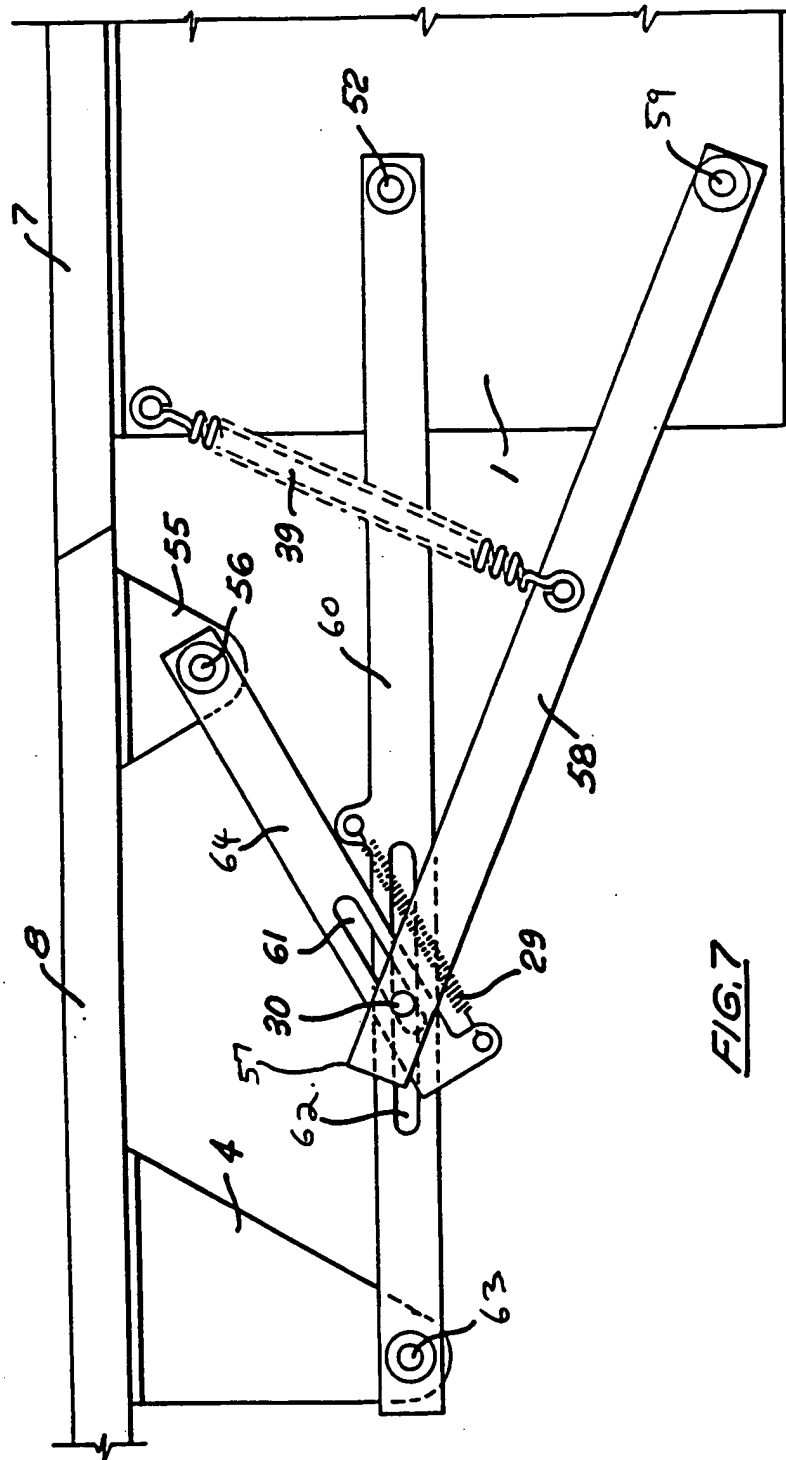

+

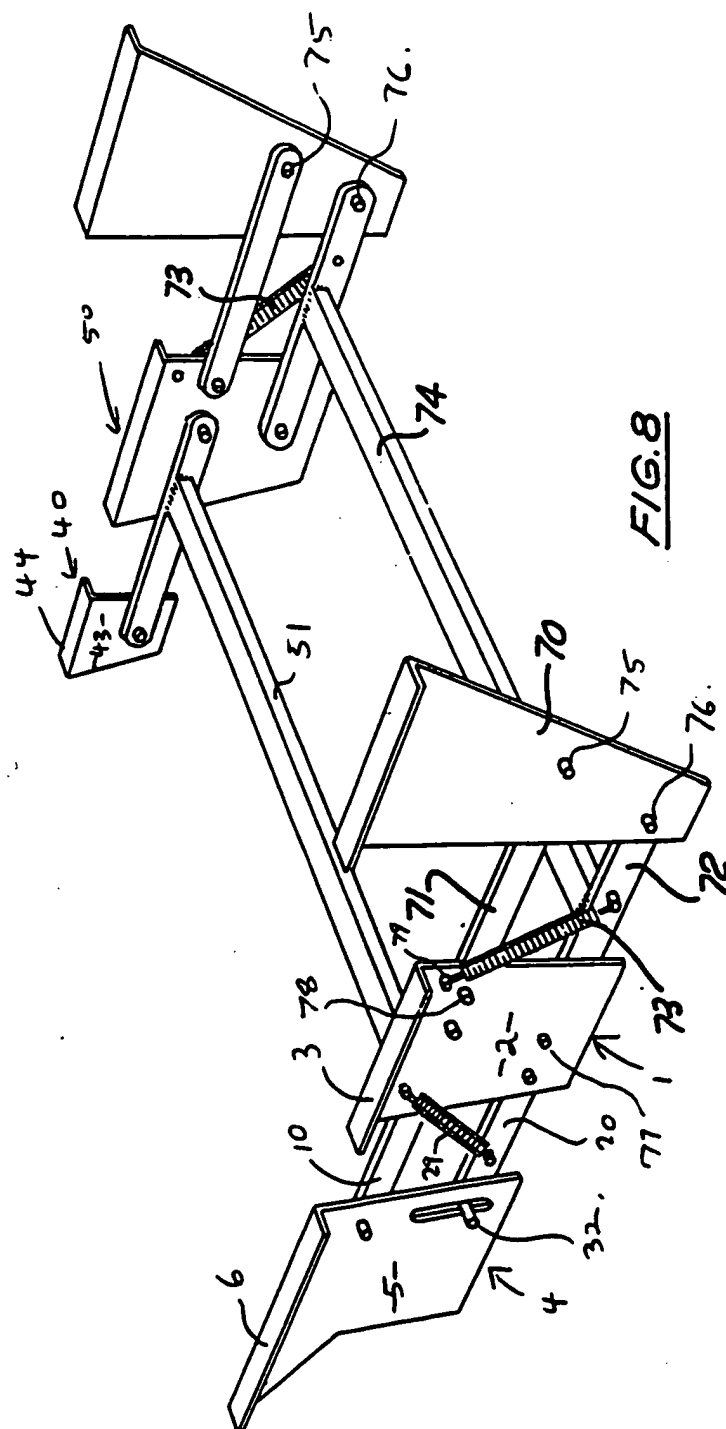

+